



# Miniature Triaxial ICP<sup>®</sup> Accelerometer



**NEW!**

## Model 356A03 Miniature Triaxial ICP<sup>®</sup> Accelerometer

The new model 356A03 is in the same package as our popular model 356A01, but provides a higher 10 mV/g sensitivity. This model includes a hermetic seal design with a lower noise floor and higher shock limit than competitive offerings, all at a lower price. In addition, it features a redesigned cable strain relief connection with a larger and stronger crimp tube, providing improved shear & tensile strength. The 356A03 is compatible with any ICP<sup>®</sup> signal conditioner or readout device that includes ICP<sup>®</sup> power. This model is CE certified and is a stock product.




Actual Size

### Highlights

- High 10 mV/g sensitivity in a miniature 0.25" (6.3 mm) cube
- Hermetically sealed titanium housing for enhanced reliability
- High 5000 g overload limit
- Supplied mating cable assembly terminating in BNC plugs

### Applications

- Small component qualification
- Structural vibration
- Environmental Stress Screening
- Noise Vibration & Harshness
- Vibration measurements with space restrictions

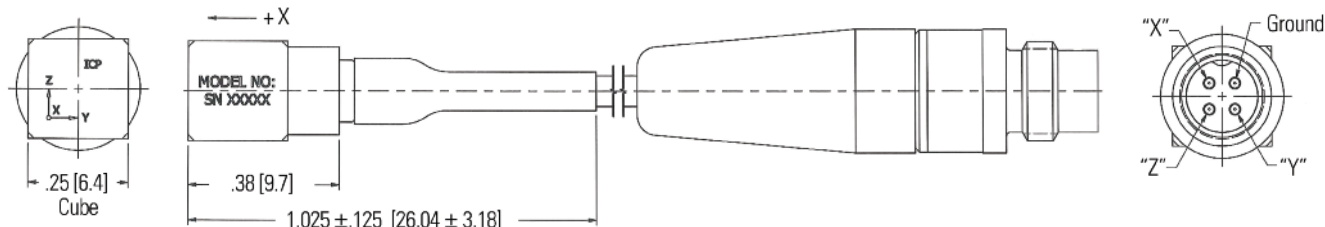

Technical Specifications		
	English	SI
Sensitivity(± 20 %)	10 mV/g	1.02 mV/(m/s <sup>2</sup> )
Measurement Range	± 500 g pk	± 4905 m/s <sup>2</sup> pk
Frequency Range(± 5 %)(y or z axis)	2 to 8000 Hz	2 to 8000 Hz
Frequency Range(± 5 %)(x axis)	2 to 5000 Hz	2 to 5000 Hz
Frequency Range(+1 dB)(x axis)		≥ 8 kHz
Resonant Frequency		≥ 50 kHz
Broadband Resolution (1 to 10,000 Hz)	0.003 g rms	
Non-Linearity		≤ 1 %
Transverse Sensitivity		≤ 5 %
Environmental		
Overload Limit(Shock)	± 5000 g pk	± 49,050 m/s <sup>2</sup> pk
Temperature Range(Operating)	-65 to +250 °F	-54 to +121 °C
Electrical		
Excitation Voltage	20 to 30 VDC	
Constant Current Excitation	2 to 20 mA	
Output Impedance	≤ 100 ohm	
Output Bias Voltage	9 to 14 VDC	
Discharge Time Constant	0.24 to 1.0 sec	
Settling Time(within 10% of bias)	<3 sec	
Spectral Noise(1 Hz)	1200 µg/√Hz	11,772 (µm/sec <sup>2</sup> )/√Hz
Spectral Noise(10 Hz)	300 µg/√Hz	2943 (µm/sec <sup>2</sup> )/√Hz
Spectral Noise(100 Hz)	100 µg/√Hz	981 (µm/sec <sup>2</sup> )/√Hz
Spectral Noise(1 kHz)	30 µg/√Hz	294 (µm/sec <sup>2</sup> )/√Hz
Physical		
Sensing Element	Ceramic	
Sensing Geometry	Shear	
Housing Material	Titanium	
Sealing	Hermetic	
Size (Height x Length x Width)	0.25 in x 0.25 in x 0.25 in	6.35 mm x 6.35 mm x 6.35 mm
Weight(without cable)	0.04 oz	1.0 gm
Electrical Connector	Integral Cable	
Electrical Connection Position	Side	
Cable Termination	1/4-28 4-Pin Jack	
Cable Length	5 ft	1.5 m
Cable Type	034 4-cond Shielded	
Mounting	Adhesive	
Supplied Accessories:		
Model 034G05 4-cond. shielded cable, 5 ft (1.5M), 4-pin plug to (3) BNC plugs (1)	Model 080A90 Quick Bonding Gel (1)	
Model 080A109 Petro Wax (1)	Model ACS-1T NIST traceable triaxial amplitude response, 10 Hz to upper 5% frequency. (1)	
All specifications are at room temperature unless otherwise specified		

## Additional Versions

PCB Model 356A01 is a similar unit, but with a 5 mV/g sensitivity providing a higher ± 1000 g measurement range

## ICP® Signal Conditioners



**Model 482C05**  
4 Channel Line Powered



**Model 480B21**  
3 Channel Battery Powered



### Corporate Headquarters

3425 Walden Avenue, Depew, NY 14043-2495 USA

Toll-Free in USA 888-828-8840

24-hour SensorLine<sup>SM</sup> 716-684-0001

Fax 716-684-0987 E-mail info@pcb.com

www.pcb.com

AS9100 CERTIFIED ■ ISO 9001 CERTIFIED ■ A2LA ACCREDITED to ISO 17025

© 2011 PCB Group, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB, ICP, Modally Tuned, Spindler, Swiveler and TORKDISC are registered trademarks of PCB Group. SoundTrack LXT, Spark and Blaze are registered trademarks of PCB Piezotronics. SensorLine is a service mark of PCB Group. All other trademarks are properties of their respective owners.

**PCB Piezotronics Test & Measurement** products include pressure, force, load, strain, torque, acceleration, shock, vibration, and electronics. PCB® products are used for product design and development, consumer product testing, quality assurance, civil structure monitoring, research and development, education and engineering applications. All products are backed by our Total Customer Satisfaction policy which guarantees your satisfaction or your money refunded.

Visit [www.pcb.com](http://www.pcb.com) to locate your nearest sales office